



Features

- Fanless
- PCI expansion slot
- Optional touch screen resistive or GFG
- IP 65 compliant front panel
- DC 11~32V wide-range power input



Specifications


System	
Processor	Intel® Atom™ N270 1.6GHz built-in, FSB 533 MHz
System Memory	1 x 200-pin SO-DIMM socket, support 533MHz up to 2GB DDR2 SDRAM
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	<ul style="list-style-type: none"> • 4 x USB 2.0 connector • 2 x RJ-45 LAN connector (GbE) • 2 x DB-9 RS232 (COM 1/2) • 1 x DB-15 VGA Port • 1 x PS2 Keyboard • 1 x PS2 Mouse • 1 x MIC, 1x LINE-Out, LINE-in • 1 x 3-pin DC Power input terminal
Storage	1 x 2.5" SATA HDD, 1 x CF Slot (internal)
Expansion Slots	1 x 32-bit PCI Slot
OS Support	Windows® XP Pro, XP Embedded, Windows® 7

LCD	
Display Type	19" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.7M
Luminance (cd/m²)	300
View Angle	H:170° / V:160°
Backlight Lifetime	50,000hrs

Touch Screen (For APC-3914T only)	
Type	Analog resistive (optional)
Light Transmission	80%

Power Supply	
Power Input	DC 11~32V

Dimension

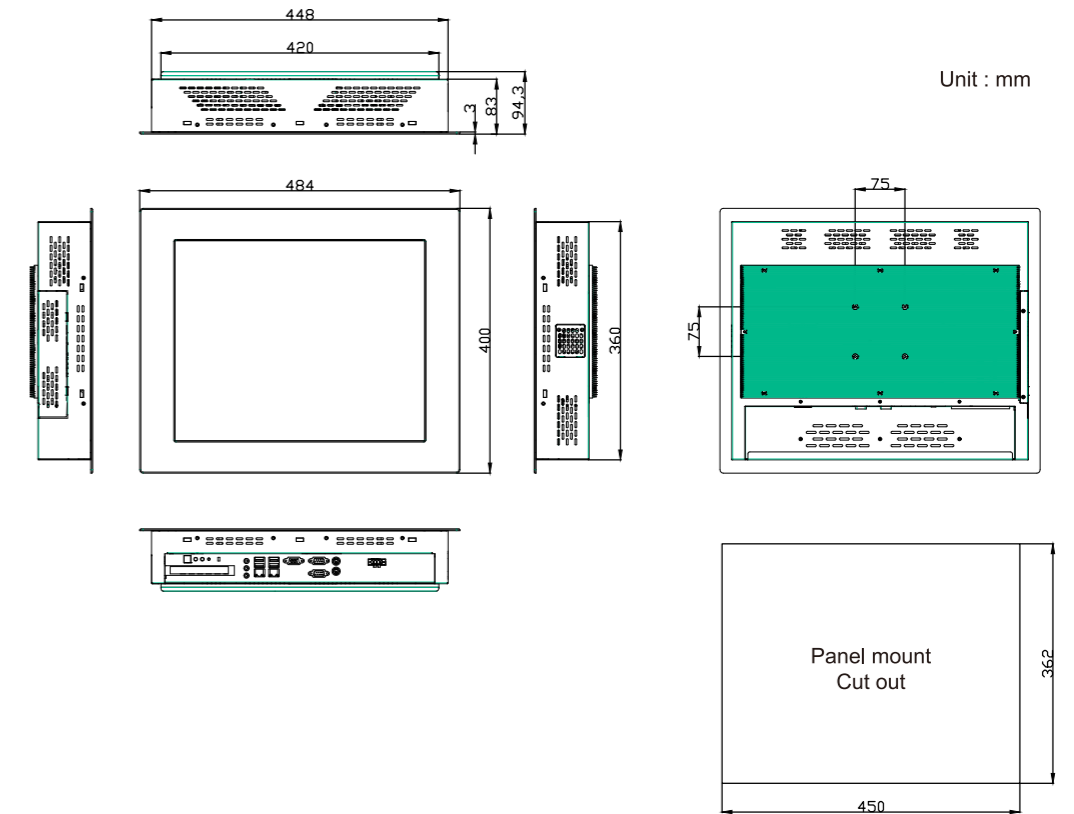

Mechanical	
Construction	Heavy-duty steel chassis
Color	Black
IP Rating	NEMA 4 / IP 65 compliant front panel
Mounting	Panel / VESA 75x75 Mount
Dimension	484(W)x400(H)x94.3(D)mm
Net Weight	12kgs

Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	Meet CE/FCC Class A

Ordering Information	
APC-3914	19" Slim / All in one panel PC with 1 x PCI slot
APC-3914T	19" Slim / All in one panel PC with 1 x PCI slot with Touch screen