

1008TX-POE+ Unmanaged Switch

N-Tron Networking Series



▶▶▶ Industrial Unmanaged Gigabit PoE+

Red Lion's N-Tron® series 1008TX-POE+ unmanaged Gigabit Power over Ethernet Plus (PoE+) switch enables plug-and-play operation for up to eight 10/100/1000Base-T(X) devices with PoE+ support on 4 ports.

Featuring 8 Gigabit RJ45 ports and a hardened DIN-rail enclosure with redundant power inputs, the 1008TX-POE+ unmanaged Ethernet switch provides up to 30 watts of IEEE 802.3af/at power per PoE port alongside plug-and-play installation, jumbo frame support and LED link/activity and PoE status indication for high-bandwidth applications. Ideal for deployment in security and surveillance, oil and gas, transportation, utilities and factory automation applications, the 1008TX-POE+ switch enables organizations to address the most demanding industrial communication requirements while increasing throughput and minimizing downtime.



APPLICATIONS

- > Security & Surveillance
- > Oil & Gas
- > Factory Automation
- > Transportation
- > Utilities
- > Alternative Energy

PRODUCT HIGHLIGHTS

- > Plug-and-Play Operation
- > IEEE 802.3af/at PoE+
- > Compact Size with Hardened Metal Enclosure
- > Wide -40° to 80°C Operating Temperature
- > Redundant 22 to 49 VDC Power Inputs

FEATURES & BENEFITS

- > 8 Gigabit Ports
 - 10/100/1000Base-T(X) (4 ports PoE+) copper ports
 - PoE ports provide Gigabit data and up to 30 watts of power out
- > Redundant 22 to 49 VDC Power Inputs
 - Keeps network running in the event of a power supply failure
 - Boosts power to meet PoE+ output requirements
- > Robust Industrial Design
 - Wide -40° to 80°C operating temperature range
 - UL/cUL: Class I, Division 2 Groups A, B, C, D, T4
 - American Bureau of Shipping (ABS) type approval
- IEEE 1613 for electric utility substations
- Ultra-reliable > 2 million hours MTBF
- > Unmanaged Switch Operation
 - Plug-and-play operation
 - Jumbo frame support
 - Auto sensing 10/100/1000Base-T(X)
 - Auto negotiation full/half duplex
 - MDIX auto cable sensing
 - Full IEEE 802.3af/at compliance
 - Up to 16 Gb/s maximum throughput
 - Full wire speed communications
 - Store-and-forward switching technology

industrial
networking



Authorised Distributor **ADITECH ICT PVT. LTD.**

803,sigma IT park,
plat no 203/204 Rabale, TTC Industrial area, Thane-Belapur road, Rabale-400701
Tel:+91 9819884527 Email: sales@aditech.inWebsite: www.aditech.in



▶▶▶ 1008TX-POE+ Unmanaged Switch Specifications

SWITCH PROPERTIES

Operation: Unmanaged
Number of MAC Addresses: 8000
IEEE Compliance: 802.3, 802.3u, 802.3ab and 802.3af/at
Latency (Typical): 3.2 μ s + frame time
LED Link/Activity Status Indicators
Power Fault Status LEDs
LED PoE Status Indicators
Supports Full/Half Duplex Operation
Maximum Throughput: Up to 16 Gb/s
MDIX Auto Sensing Cable
Auto Sensing Speed and Flow Control
Communications: Full Wire Speed
MTBF: >2 million hours

POWER INPUT

Input Voltage Range: Dual 22-49 VDC power inputs
Steady Input Current (Full PoE Load): 5.64 A @ 24 VDC
Steady Input Current (No PoE Load): 530mA @ 24 VDC
Inrush: 70.5 A / 60us @ 24 VDC
BTU/HR: 60

POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit endspan PSE
PoE Output Power: 57 VDC / 30 W (25.5 W at PD) per port
Power Pin Assignment: Pins 1/2 (+), Pins 3/6 (-)
PSE Type: Type 2

CONNECTORS

10/100/1000Base-T: Eight (8) RJ-45 ports (PoE+ on ports 5 - 8)

NETWORK MEDIA

10BaseT: \geq Cat3 cable
100BaseTX: \geq Cat5 cable
1000Base-T: \geq Cat5e cable
802.3af (802.3at Type 1) PoE: \geq Cat3 cable
802.3at Type 2 PoE+: \geq Cat5 cable

RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)
Top: 1" (2.54 cm)

ENVIRONMENTAL

Operating Temperature: -40°C to 80°C
Storage Temperature: -40°C to 85°C
Operating Humidity: 10% to 95% (non condensing)
Operating Altitude: 0 to 10,000 ft.
Shock: 200 g @ 10 ms (bulkhead mounted)
Vibration/Seismic: 50 g, 5-200 Hz, triaxial (bulkhead mounted)

CERTIFICATION & COMPLIANCE

Product Safety: ANSI/ISA 12.12.01-2015 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations, T4 UL508 Industrial Control Equipment
CAN/CSA-C22.2 No. 213-15, Hazardous Locations
CAN/CSA-C22.2 No. 14-13, Industrial Control Equipment
Emissions: FCC Title 47, Part 15, Radio Frequency Devices, Subpart B, ANSI C63.4-2009; Industry Canada ICES-003, EN 55032, EN 61000-3-2, EN61000-3-3
Immunity: EN 55024, EN 61000-6-2, EN 61000-4-2 (ESD); EN 61000-4-3 (RFAM); EN 61000-4-4 (EFT); EN 61000-4-5 (SURGE); EN 61000-4-6 (RFCM); EN 61000-4-8 (PFMF); EN 61000-4-11 (VDI)
Rail: EN 50155, EN 50121 and EN 61373
Designed to Comply with: IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)
Other: ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

MECHANICAL

Case Dimensions:
Height: 5.9" (15 cm)
Width: 2.0" (5.1 cm)
Depth: 5.9" (15 cm)
Weight: 1.52 lbs (0.69 kg)
Ingress Protection: IP20
Mount: DIN rail (35 mm)

WARRANTY

3 Years on Design and Manufacturing Defects

ORDERING GUIDE

MODEL NUMBER	DESCRIPTION
1008TX-POE+	8-Port Industrial Unmanaged Gigabit PoE+ Switch (4 10/100/1000Base-T Ports, 4 10/100/1000Base-T with PoE+ Ports)
NTPS-24-10	DIN-Rail Power Supply 10 Amp @ 24 VDC
1K26-PMK	Panel Mount Kit, 1000 Series


Specifications are subject to change. Visit www.redlion.net for more information.

Authorised Distributor
ADITECH ICT PVT. LTD.

803, sigma IT park,
plat no 203/204 Rabale, TTC Industrial area, Thane-Belapur road, Rabale-400701
Tel:+91 9819884527 Email: sales@aditech.in Website: www.aditech.in

▶▶▶ 1008TX-POE+ Unmanaged Switch Specifications

DIMENSIONS

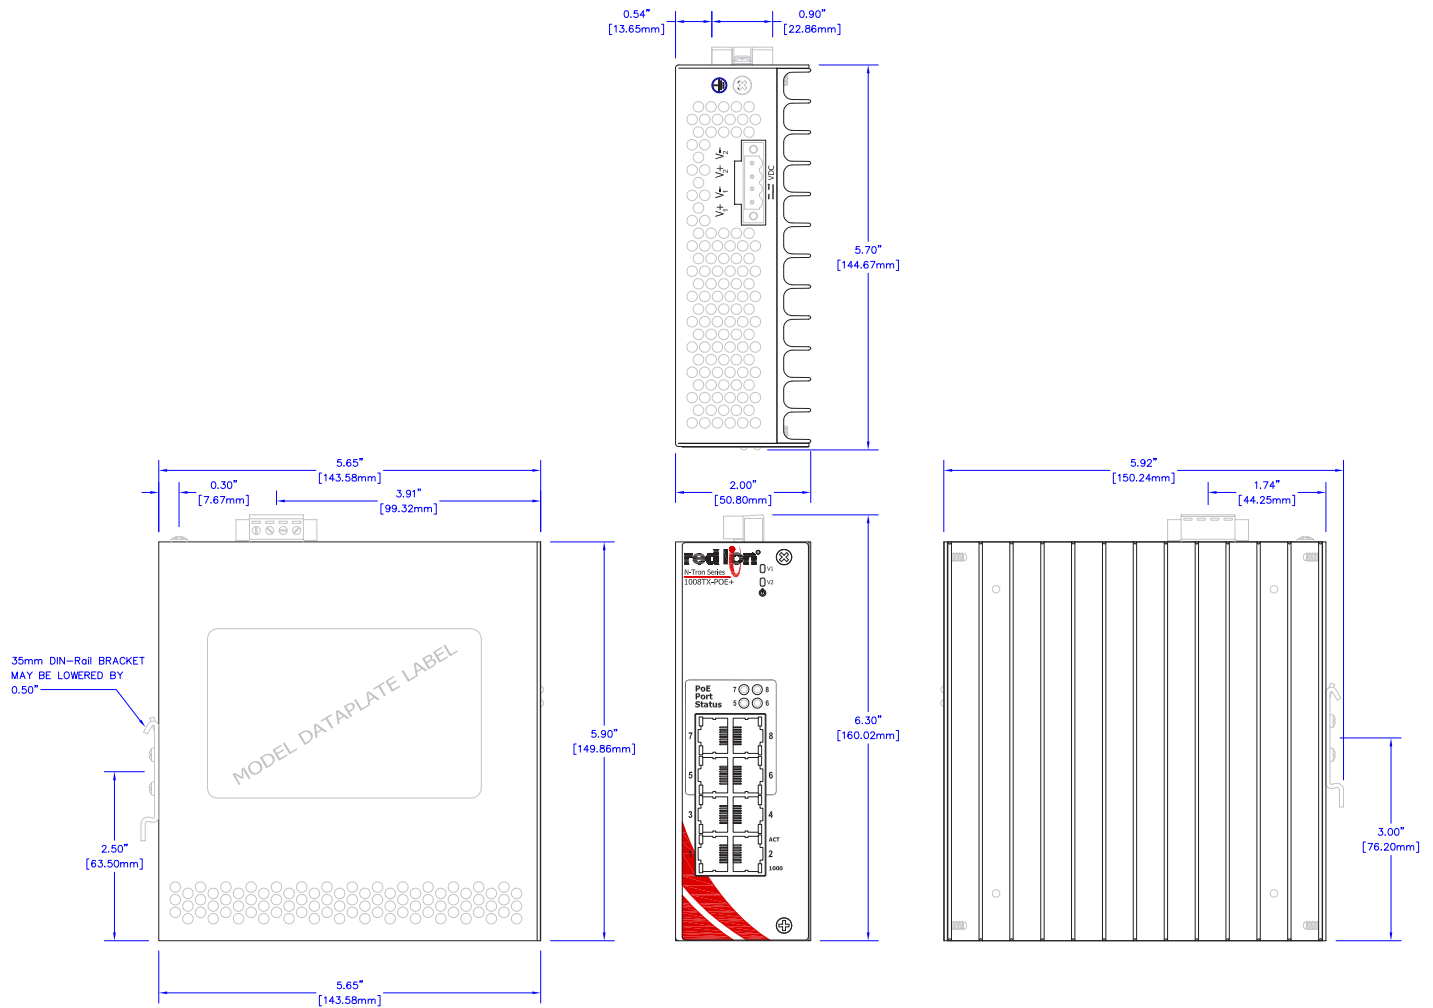

www.redlion.net

Connect. Monitor. Control.



Authorised Distributor
ADITECH ICT PVT. LTD.
 803, sigma IT park,
 plat no 203/204 Rabale,
 TTC Industrial area,
 Thane-Belapur road,
 Rabale-400701
 Tel: +91 9819884527
 Email: sales@aditech.in
 Website: www.aditech.in

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0465 012918 © 2018 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.