

104TX Industrial Ethernet Switch

N-Tron Networking Series



▶▶▶ Unmanaged Industrial Ethernet Switch

The *N-TRON® 104TX* is a low cost unmanaged four port Industrial Ethernet Switch. It is housed in a hardened, metal, DIN-Rail enclosure, and is designed for use in mission critical data acquisition, control, and Ethernet I/O applications.

PRODUCT FEATURES

- Compact, Space Saving Package
- Full IEEE 802.3 Compliance
- American Bureau of Shipping (ABS) Type Approval
- EN50155 for Railway applications
- Four 10/100BaseTX RJ-45 Ports
- Unmanaged Operation
- Extended Environmental Specifications
 - -40°C to 80° Operating Temperature
 - >2M Hours MTBF
- Supports Full/Half Duplex Operation
- Up to 800 Mb/s Maximum Throughput
- MDIX Auto Sensing Cable
- Auto Sensing Speed and Flow Control
- Full Wire Speed Communications
- Store-and-forward Technology
- Redundant Power Inputs (10-30 VDC)
- LED Link/Activity Status Indication
- Hardened Metal DIN-Rail Enclosure

PRODUCT OVERVIEW

The *104TX* Industrial Network Switch is designed to solve the most demanding industrial communication requirements while providing high throughput and minimum downtime.

The *104TX* provides four RJ-45 auto sensing 10/100BaseTX ports. All ports are full/half duplex capable, using "state of the art" Ethernet switching technology. The *104TX* auto-negotiates the speed and flow control capabilities of the four TX port connections, and configures itself automatically.

Since the *104TX* is auto sensing, there will be no need to make extensive wiring changes if upgrades are made to the host computers, plant systems, or Ethernet I/O modules. The switching fabric simply scales up or down automatically to match specific network environments.



The *104TX* supports up to 2,000 MAC addresses, enabling these products to support extremely sophisticated and complex network architectures.

The *104TX* is an ideal candidate for upgrading existing hubs and repeaters to increase bandwidth and determinism by virtually eliminating network collisions. The *N-TRON 104TX* combines affordability and the plug & play simplicity of the unmanaged hub.

The *104TX* can simplify plant wiring by eliminating the need to bring data acquisition and control network connections back to a climate controlled environment. The *104TX* has extended operating environmental specifications to meet the harsh needs of the industrial environment. For cost savings and convenience the network switch can be DIN-Rail mounted alongside Ethernet I/O or other Industrial Equipment.

To increase reliability the *104TX* provides dual redundant power inputs. LED's are provided to display the link status and activity of each port.

industrial
networking

Authorised Distributor
ADITECH ICT PVT. LTD.

803, sigma IT park, plat no 203/204 Rabale, TTC Industrial area, Thane-Belapurroad, Rabale-400701
Tel:+91 9819884527 Email: sales@aditech.in Website:www.aditech.in



104TX SPECIFICATIONS

Case Dimensions

Height:	2.9"	(7.3cm)
Width:	1.5"	(3.8 cm)
Depth:	3.6"	(9 cm)
Weight:	0.6 lbs.	(0.28 kg)
DIN-Rail:	35mm	

Electrical

Input Voltage:	10-30 VDC
Steady Input Current:	215mA@24V
Inrush:	7.8Amp/0.7ms@24V

Environmental

Operating Temperature:	-40°C to 80°C
Storage Temperature:	-40°C to 85°C
Operating Humidity:	10% to 95% (Non Condensing)
Operating Altitude:	0 to 10,000 ft.

Reliability

MTBF:	>2 Million Hours
-------	------------------

Network Media

10BaseT:	>Cat3 Cable
100BaseTX:	>Cat5 Cable

Connectors

10/100BaseTX:	Four (4) RJ-45 TX Copper Ports
---------------	-----------------------------------

Recommended Wiring Clearance

Front:	2" (5.08 cm)
Top:	1" (2.54 cm)

Ordering Information

104TX	Four 10/100BaseTX Ports
NTPS-24-1.3	DIN-Rail Power Supply 24V@1.3 Amp
100-MDR-1	Metal Din Rail Option*

* MDR option must be specified with switch order - not field upgradable

BENEFITS

Industrial Network Switch

- Compact Size / Small Footprint
- Extended Environmental Specifications
- Hardened Metal DIN-Rail Enclosure
- High Performance
- High MTBF >2M Hours
- ESD Protection Diodes on RJ-45 Ports
- Surge Protection Diodes on Power Inputs

Ease of Use

- Plug & Play Operation
- Auto Sensing 10/100BaseTX
- Auto Negotiation Full/Half Duplex
- MDIX Auto Cable Sensing
- Unmanaged Operation

Increased Performance

- Full Wire Speed Capable
- Full Duplex Capable
- Eliminates Network Collisions
- Increases Network Determinism


Regulatory Approvals

*FCC Title 47 Part 15 Class A; ICES-003-Class A
CE: EN61000-6-2,4; EN61000-4-2,3,4,5,6; EN55011
UL Listed (US and Canada) per ANSI/ISA-12.12.01-2007,
Class I, Div 2, Groups A,B,C,D,T4A
ABS Type Approval for Shipboard Applications
DNV-GL Type Approval Certification
EN50155 for Railway Applications
RoHS Compliant; GOST-R Certified*


Designed to comply with:

*IEEE 1613 for Electric Utility Substations;
and NEMA TS1/TS2 for Traffic Control Equipment*

104TX with Standard DIN rail Mount

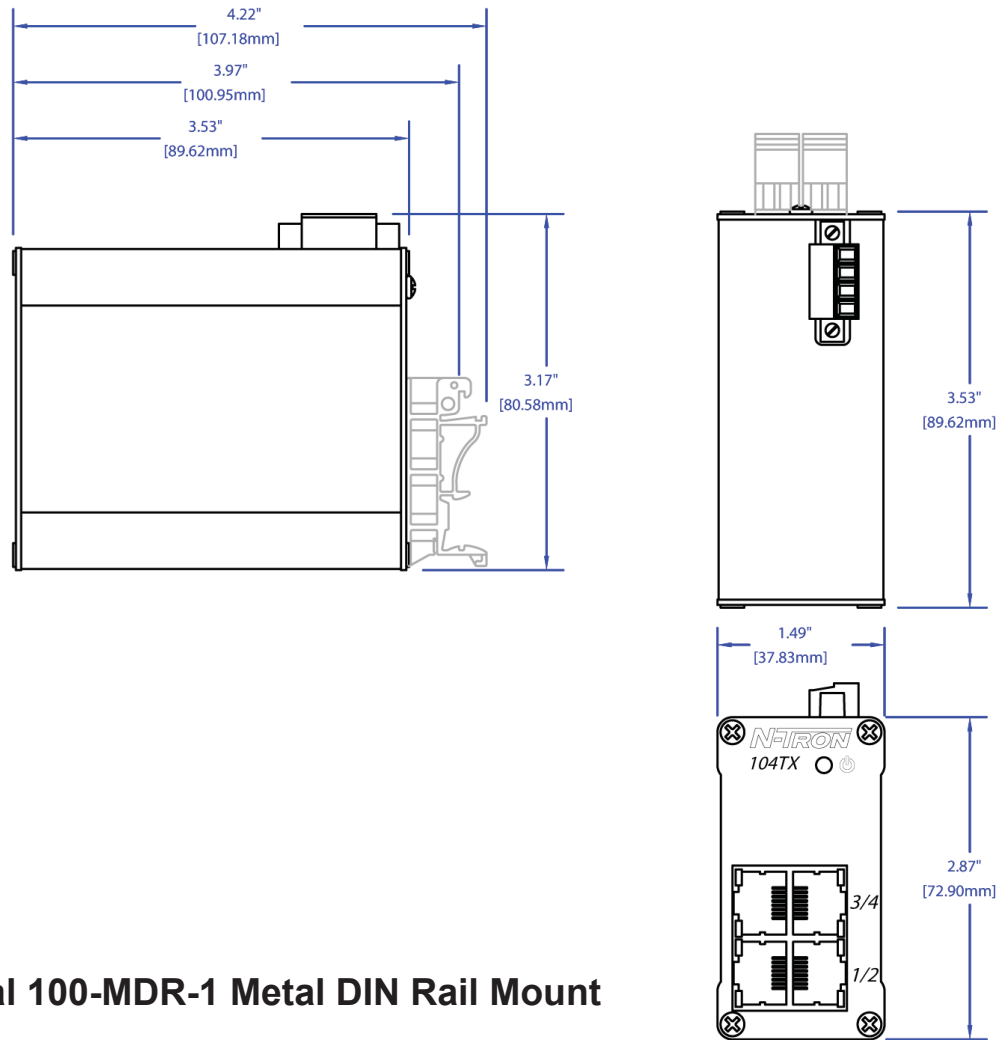

Optional 100-MDR-1 Metal DIN Rail Mount

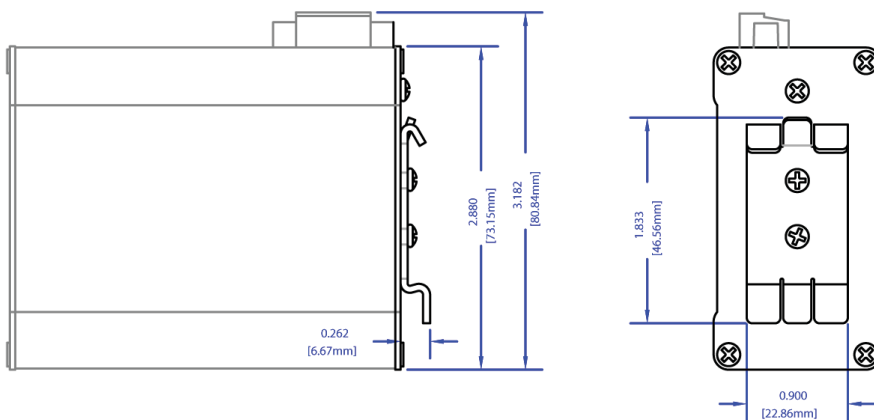

Authorised Distributor
ADITECH ICT PVT. LTD.
 803, sigma IT park,
 plat no 203/204 Rabale,
 TTC Industrial area,
 Thane-Belapur
 road, Rabale-400701
 Tel: +91 9819884527
 Email: sales@aditech.in
 Website: www.aditech.in