



Features

- 19" color TFT LCD
- Aluminum (10mm) Bezel and Alu. housing (with Anti-Corrosion Coating)
- Intel Core 4th Gen i3/i5/i7 Processor
- 4G DDR3L on board
- 1 x 2.5" HDD space
- 1 x SD slot on board and 1 x CF slot (Option)
- 9~36V DC Power Input with isolated
- CE/FCC/IEC 60945 certificated
- Marine Application

Specifications

System	
Processor	Intel Core i3-4010U Processor (3M Cache, 1.7 GHz) / TDP:15W Intel Core i5-4300U Processor (3M Cache, 2.9 GHz) / TDP:15W
System Chipset	SOC
System Memory	Onboard 4GB DDR3L 1333/1600 MHz
Storage	Default : 1 x 2.5" HDD space 1 x Internal SD slot on board Optional : 1 x Internal CF slot


External I/O	
USB	2 x USB 3.0 type A
Serial/Parallel	1 x RS-232/422/485 selectable default RS-485 DB9 (COM 1) 1 x RS-232 DB9 (COM 2) 1 x HDMI with Cover 1 x Line-out, phone jack 1 x ESD ground
LAN	2 x GbE RJ-45
Power	1 x 2 pin terminal block connector (for remote power switch) 1 x 3 pin terminal block connector
Front Side I/O	1 x Backlight on/off with touch on/off 1 x Power System LED 1 x VR knob Brightness Control 1 x Power on/off button 2 x LED light for power and HDD indication 1 x USB Port with Waterproof Cover Design
Option	2 x USB 1 x RS-232

Expansion	
On board expansion bus	1 x Mini PCIe full size slot on board Option wifi/BT or 3G with Antenna 1 x Mini PCIe full size slot on board Option isolation 2 x RS-422/485 isolation

LCD	
Display Type	19" TFT-LCD
Max. Resolution	1280 x 1024
Max. Color	16.7M
Contrast Ratio	1000 : 1
Luminance (cd/m ²)	350
View Angle	H: 170 / V: 160
Backlight Lifetime	50,000 hrs

Touch Screen	
Type	Resistive Touch Window
Interface	USB
Light transmission (%)	80%

Dimensions

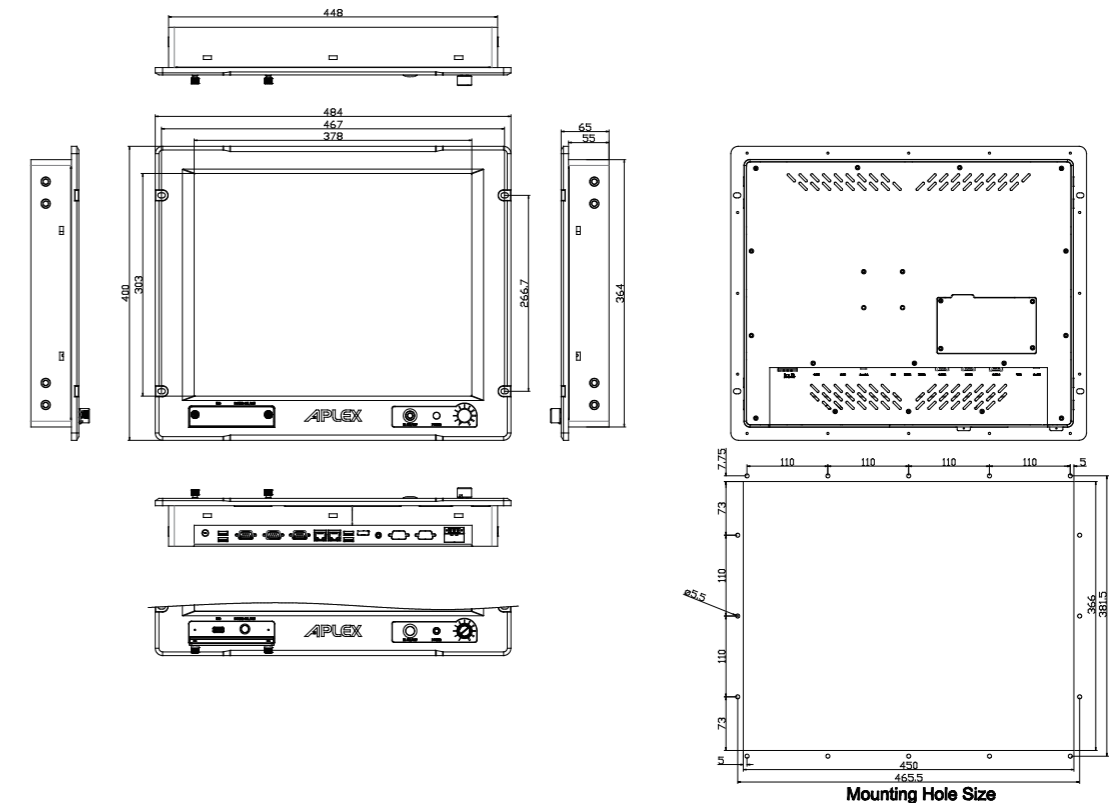

Power	
Power input	9~36V DC with isolated / AC power option
Power Consumption	Max: 41.8W

Mechanical	
Chassis Color	Black/ Aluminum(10mm) bezel and Aluminum housing Anti-Corrosion Coating
Mounting	Panel Mount and Front access mount Mounting bracket (option)
Dimension	484 x 400 x 65 mm
Net Weight	9.5 Kgs

Environmental	
Operating temperature(°C)	0°C to 50°C Optional WT1 -20°C ~60°C(with industrial SSD)
Storage temperature(°C)	-30°C~70°C
Storage humidity	10 to 90% @ 40°C, non- condensing
Waterproof/Dustproof	Front Panel IP65
Certificate	CE/FCC/IEC 60945 Certified Meet IACS E10/DNV Standard

Operating System Support	
Windows 7 Professional for Embedded Systems, Windows 7 Ultimate for Embedded Systems, Windows Embedded Standard 7, Windows Embedded 8.1 Industry Pro, Windows Embedded 8 Standard, Windows 10 IoT	

Ordering information	
ADI-3920-01	19" SXGA Marine panel PC bare bone, Intel Core i3-4010U 1.7GHz processor, 4G DDR3, 2.5" SATA2 320G Industrial HDD, with resistive touch, DC 9~36V power input with Adaptor, Aluminum(10mm) bezel and Aluminum enclosure
ADI-3920-02	19" SXGA Marine panel PC bare bone, Intel Core i5-4300U 2.9GHz processor, 4G DDR3, 2.5" SATA2 320G Industrial HDD, with resistive touch, DC 9~36V power input with Adaptor, Aluminum(10mm) bezel and Aluminum enclosure



ADITECH ICT PRIVATE LIMITED
803, Sigma IT Park, Plot NoR203/204,
Plot No R203/204,
TTC Industrial Area
Rabale , Navi Mumbai - 400701
Tel : +91 9819884527
Email : sales@aditech.in
Website : www.aditech.in