


## Features

- 15" TFT LCD Panel PC
- Intel Celeron N2930 Processor
- Modular Concept and Fanless Design
- Support PCT/RTW/AR Glass
- Front Bezel IP66
- Option WiFi/BT/Speaker
- Support 2 x Expansion slot
- DC 9~36V Power input, option AC power input

## Specifications

System	
CPU	Intel Celeron N2930 processor
System Chipset	SoC
Memory	2 x 204-pin DDR3L SO-DIMM slot up to 8GB
IO Port	
Rear side I/O port	4 x USB 3.0 type A 2 x RJ45 GbE LAN 1 x DB9 RS-232/422/485 default RS-232 1 x DB9 RS-232 1 x DB9 RS-422/485 default RS-485 1 x DB15 VGA 1 x HDMI with Cover 1 x Line-out/Mic-in 1 x 2 pin Terminal block for external power switch 2 x LED indication for HDD/System 1 x System LED indication at front 1 x 3 pin TB Power connector 1 x Power Switch on/off
Option I/O	4 x USB 2.0 Type A via TB-546 2 x DB9 COM port 1 x 8-bit GPIO (3 in/out/VCC/GND)
Storage Space	
HDD	1 x 2.5" SATA HDD Space (Easy Accessible Storage Design)
Expansion	
Expansion Slot	1 x Full-size Mini PCIe on board (PCIe/USB/SATA, SATA by default) 1 x Half-size Mini PCIe on board (PCIe/USB, PCIe by default) 1 x SIM slot for option (Option wifi/BT/4G and antenna at rear side) 1 x PCI and 1 x PCIe x1 slot via TB-560P1E11 (default)
Display	
Display Type	Standard: 15" TFT-LCD, High Brightness Optional: 15" TFT-LCD
Max. Resolution	Standard: 1024 x 768, High Brightness Optional: 1024 x 768
Max. Color	Standard: 16.7M, High Brightness Optional: 262K / 16.2M
Luminance (cd/m <sup>2</sup> )	Standard: 420, High Brightness Optional: 1000
View Angle	Standard: 160(H) / 160(V), High Brightness Optional: 160(H) / 150(V)
Contrast	Standard: 800:1, High Brightness Optional: 800:1
Backlight Lifetime	Standard: 50,000 hrs, High Brightness Optional: 30,000 hrs
Option	Standard: Auto Dimming, High Brightness Optional: Auto Dimming
Touch Screen	
Interface	Resistive Touch: USB, Projected Capacitive Touch: USB
Light Transmission(%)	Resistive Touch: Over 80%, Projected Capacitive Touch: Over 90%
Power	
Power Input	DC 9~36V Power input, option AC power input

## Dimensions

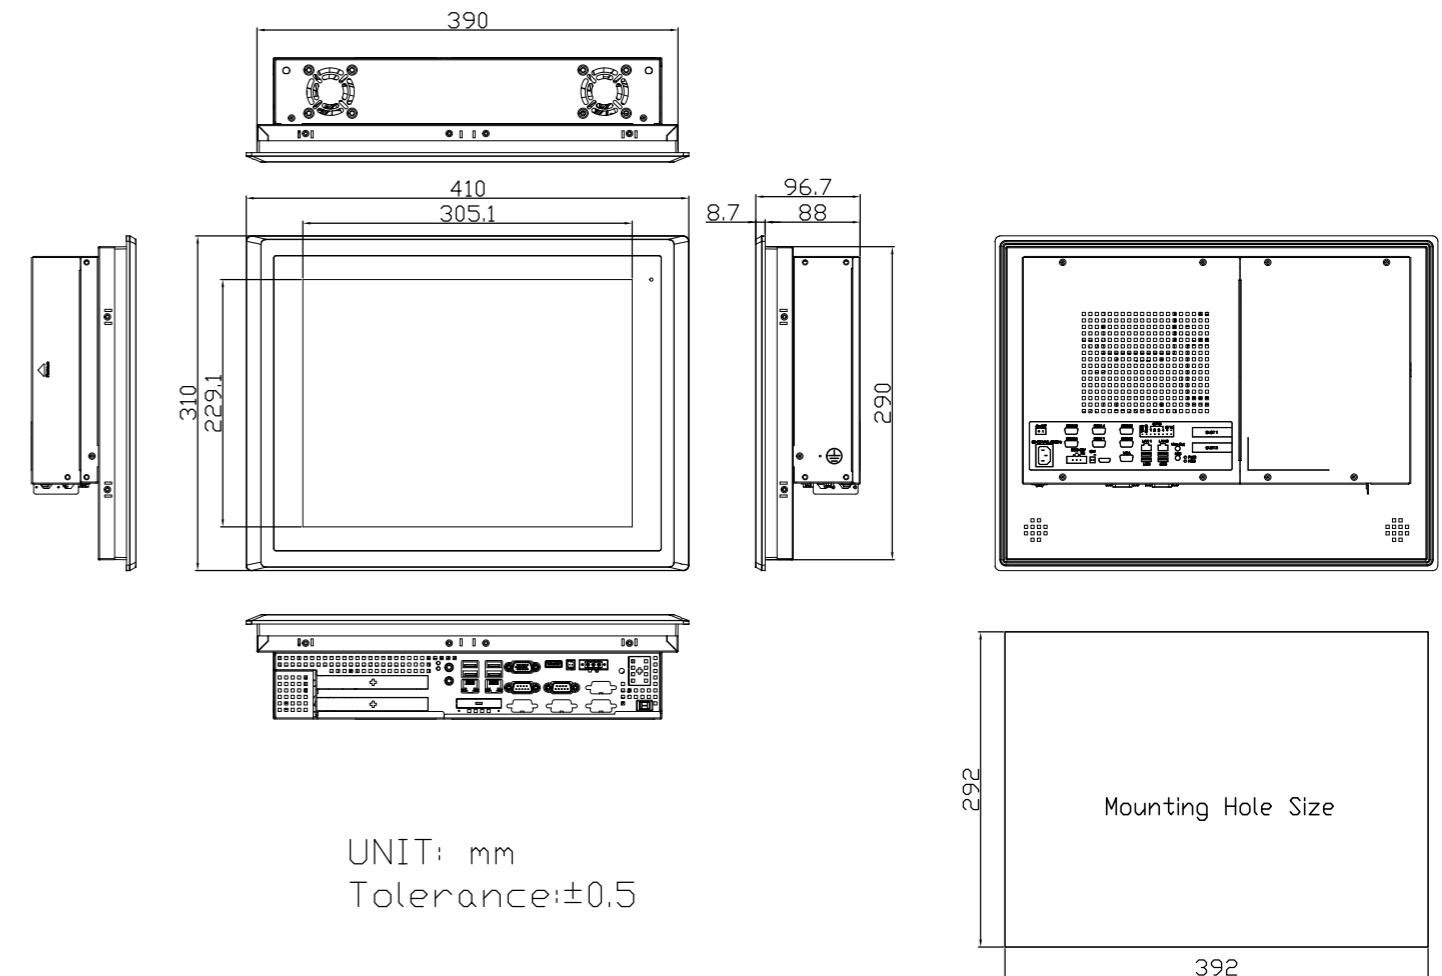

Mechanical	
Construction	Aluminum die-casting front bezel
Mounting	Panel Mount
IP Rating	Front Panel IP66
Dimensions	410 x 310 x 96.7 mm
Net Weight	6.3 kg

Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 95% @ 40°C, non- condensing
Certificate	CE / FCC Class A

Operating System Support	
Windows embedded 7	
Windows embedded 8.1	
Windows 10 IoT	

Ordering Information	
ADI-PAC-815R	15" XGA Intel Celeron N2930 (1.83.GHz ) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, resistive touch window, 9~36VDC power input with adaptor, Alu.die-casting front bezel.
ADI-PAC-815P	15" XGA Intel Celeron N2930 (1.83.GHz ) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, projected capacitive touch, 9~36VDC power input with adaptor, Alu.die-casting front bezel.



**ADITECH ICT PRIVATE LIMITED**  
 803, Sigma IT Park, Plot No R203/204,  
 Plot No R203/204,  
 TTC Industrial Area  
 Rabale , Navi Mumbai - 400701  
 Tel : +91 9819884527  
 Email : [sales@aditech.in](mailto:sales@aditech.in)  
 Website : [www.aditech.in](http://www.aditech.in)