



Features

- 15" steel enclosure industrial displa
- IP65 compliant front bezel
- OSD at front side
- VESA mount 75 x 75
- Anti-reflection glass in front for protection (optional touch panel)
- Default AC 100~240V input, optional DC 11~32V input
- Default: VGA input, Optional: DVI, RCA, and S-Video input

Specifications

I/O Port

Outside I/O port	Default: VGA input AC 100~240V input Option (reserved): DVI RCA S-Video Touch I/O 3-pin terminal block for DC 11~32V input
OSD control	OSD on the front side default, OSD on the rear side for option

LCD

Display Type	15" TFT LCD
Max. Resolution	1024 x 768
Max. Color	262K
Contrast Ratio	800: 1
View Angle	160 (H) / 160 (V)
Backlight Lifetime	30,000 hrs
Luminance (cd/m ²)	420 nits

Power

Power Input	AC input / DC 11~32V optional
Power Consumption	MAX: 12W


Touch Screen – Resistive Type (Option)

Interface	USB / RS-232
Light Transmission	Over 80%

Mechanical

Construction	Black Steel Front Panel Option Front Bezel : 304 S.S. / 316L S.S. / Aluminum Chassis Black Steel Back Cover
Mounting	Panel mount / VESA mount 75 x 75 / Rack Mount (Option)
IP Rating	Front side IP65
Dimensions	409 x 309 x 64.7 mm
Net Weight	6.2 Kg

Dimension

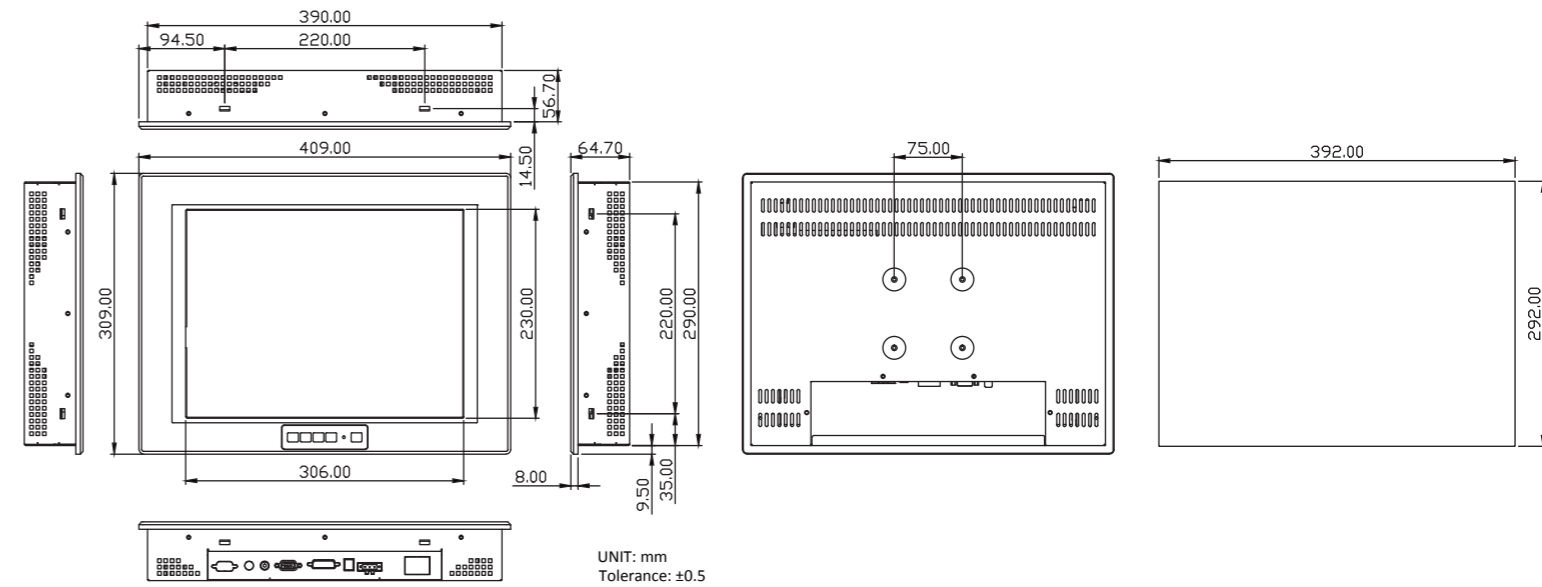

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A

Ordering Information

ADISP-1154-15	15" XGA industrial display, VGA input, 5 keys front OSD,
	AC 100~240V power input, no touch with protective glass, steel enclosure



ADITECH ICT PRIVATE LIMITED
 803, Sigma IT Park, Plot No R203/204,
 Plot No R203/204,
 TTC Industrial Area
 Rabale, Navi Mumbai - 400701
 Tel : +91 9819884527
 Email : sales@aditech.in
 Website : www.aditech.in