













Total IP66 Grade with M12 Waterproof Connector

21.5" ATEX Certified Stainless Steel Display

- Wide range DC 9~36V Power Input
- Support Panel Mount & VESA Mount
- Support Projected Capacitive Touch
- Full Flat Bezel and Fanless Design
- Stainless Steel OSD Function Key
- ATEX Zone2, IECEx and C1D2 Certified

IECEx Certification: Ex nA ic IIC T4 Gc

ATEX Certification: (Ex) II 3 G

C1D2 Certification: Class I, Division 2, Groups A, B, C, D T4



Specifications /



External I/O

1 x M12 8-pin for 2 x USB 2.0 for Touch Control with waterproof USB

cover and chain

1 x M12 12-pin for VGA with waterproof cover and chain Graph 1 x M12 8-pin for OSD Cable & External OSD BOX with

Function Keypad waterproof cover and chain

1 x M12 3-pin for DC power connector with waterproof cover and Power





ADITECH ICT PRIVATE LIMITED

803, Sigma IT Park, Plot NoR203/204, Plot No R203/204.

TTC Industrial Area

Rabale, Navi Mumbai - 400701 Tel: +91 9819884527

Email: sales@aditech.in Website: www.aditech.in

Dispalay

Display Type 21.5" TFT-LCD 1920 x 1080 Max Resolution Max. Color 16.7M Luminance (cd/m²) 300 178(H) /178(V) View Angle

5000:1 **Backlight Lifetime** 50,000 hrs

Projected Capacitive Touch Type

USB Interface Light Transmission(%)

DC 9~36V

Power Consumption AEx-121P: 24W

Construction 316 stainless steel chassis


Mounting VESA mount 100 x 100, Panel mount (option)

IP Rating Total IP66

Dimensions 571 x 362 x 75.1 mm

Net Weight 12.2 kg

Dimensions /

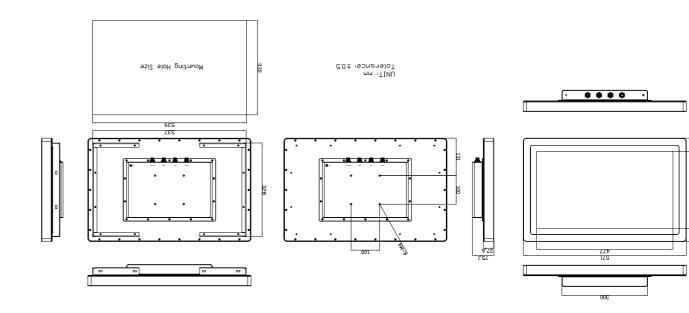

Environmental	
Environmental	
Operating Temperature	-20~60°C
Storage Temperature	-30~70°C
Storage Humidity	10 to 90% @ 40°C, non- condensing
Safety	CSA C22.2 No.61010
Certificate	CE / FCC Class A, ATEX Zone2 Ex nA ic IIC T4 Gc Class I, Division2, Group ABCD T4 ANSI/ISA 12.12.01-2013 CSA Std. C22.2 No213-1987

Operating System Suppor

Windows embedded 7 Windows embedded 8.1 Windows 10 IoT ENT LTSB

Ordering Information

21.5" FHD IP66, 316 Stainless display, VGA input, external OSD box,

Projected capacitive touch, 9~36V DC Power input, VESA Mount,

AEX-121P

Accessary: 1 x M12 for USB touch cable, 1 x VGA Cable, 1 x 3pin power

input cable (w/o Adapter)

V 1.3