


### Features

- Supports SATA to dual SATAIII Port Multiplier.
- Supports H/W RAID 0/1 over SATA.
- Supports USB 2.0 to dual SATAIII.
- Pin header for Access/Error LED connection.
- 3 years warranty.
- Industrial design, manufacture in innodisk Taiwan.

### Mechanical Drawing

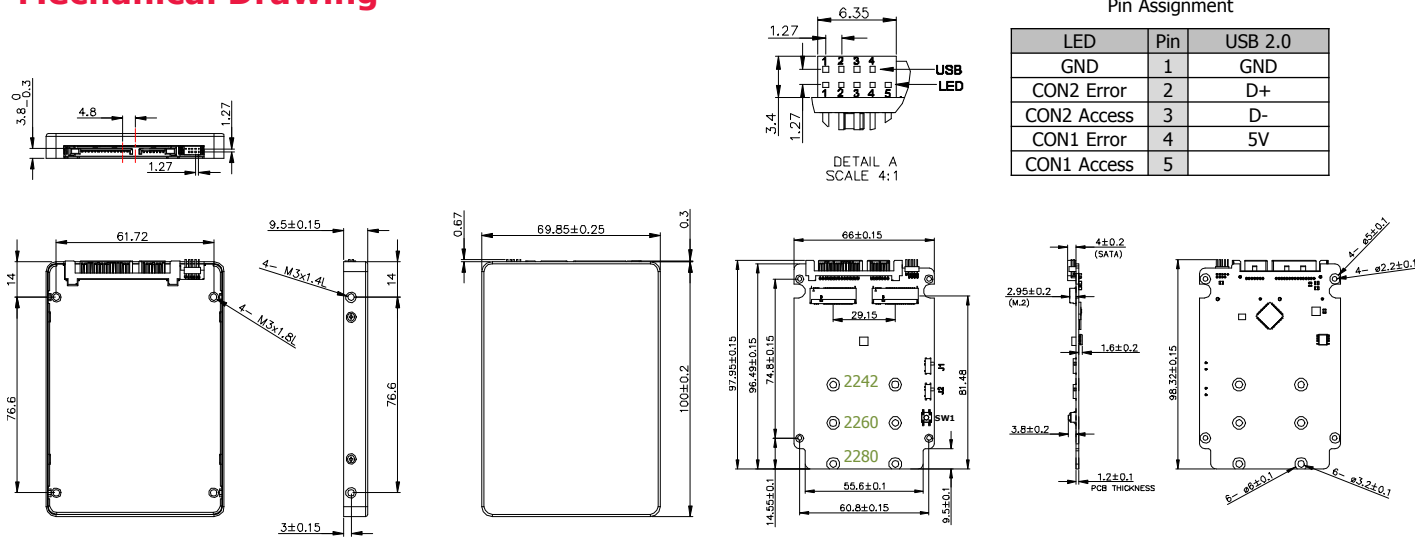

### Specifications

**Headquarters (Taiwan)**  
 5F., No. 237, Sec. 1, Datong Rd.,  
 Xizhi Dist., New Taipei City 221,  
 Taiwan  
 Tel: +886-2-77033000  
 Email: sales@innodisk.com

**Branch Offices:**  
**USA**  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
 +1-510-770-9421

**Europe**  
[esusales@innodisk.com](mailto:esusales@innodisk.com)  
 +31-040-282-1818

**Japan**  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
 +81-45-594-7581

**China**  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
 +86-755-21673689

[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
 All right reserved. Specifications  
 are subject to change without  
 prior notice.

June 25, 2015

Form-Factor	2.5" SSD
Input I/F	SATA III, USB 2.0
Output I/F	SATA III
Output Connector	M.2 Key-B 2242/2260/2280 x 2
TDP	4W (5V x 800mA)
Dimension (WxLxH)	69.85 x 100 x 9.5mm, Weight: 80g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	1. RAID Mode Setting: [J1:J2] RAID0: 2:2, RAID1: 1:2, PM: 1:1 2. Press tact switch SW1 for reset.

### Order information

**E2SS-32R2-C1**  
 2.5" to Dual M.2 RAID Module