


Entry level IOT gateway

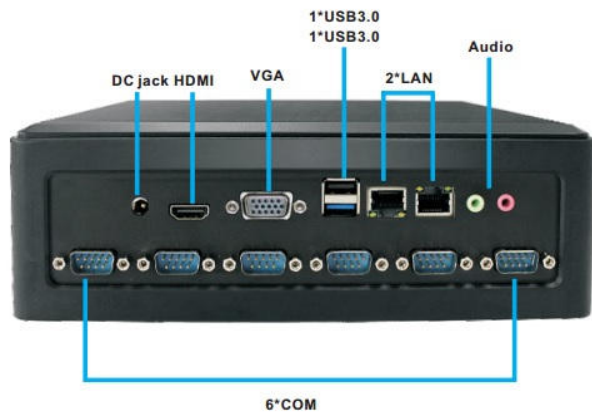

Features :

- Onboard Intel Bay trail mobile celeron J1900
- Support single channel DDR3L-1333MHz
- Multiple display: HDMI, LVDS, VGA
- Aluminium enclosure
- Full HD 1080P playback
- 12V DC input

System: -

CPU	Celeron J1900 (2.00GHz, quad-core, TDP10W)
Core Frequency	2.0 GHz, quad-Core
Cache	3MB
Memory	1 x single channel DDR3L-1333 MHz upto 8GB

Display: -

LVDS	1
HDMI	HDMI 1
VGA	1

Storage :-

SATA	1
mini PCie	HDMI 1

Power :-

Supply	1 x DC_IN 12V
---------------	---------------

External I/O :-

USB	4x USB
DC-IN	1
Ethernet	2x Realtek gigabit LAN chip RTL8111F
COM	6 x COM (2 x RS485 , 4 x RS 232)
Audio	ALC662 chip, Mic in, Line out
Wake on LAN	Yes

Environment :-

Enclouser material	Alluminium alloy
Cooling system	Fanless
Colour	Black
Operating temp.	-20 to 60 degree with wide temp RAM and SSD

Mechanical :-

Dimension (W x D x H)	230mm x 190mm x 70mm
Weight (Net)	2.0 Kg

OS Support: -

Windows 10	win 7, win 8, win10, Linux
-------------------	----------------------------

Ordering Information

IOT-1900	IOT Gateway with J1900
Optional	4 GB RAM 32 GB mSATA

Note : All Specification are subject to change without any Notice.
All logos and trademarks belongs to the respective owners.