

Datasheet

# CFast 3MG2-P series

- SATA III solution for industrial field
- High Sequential/IOPS performance
- Intelligent error recovery system
- iSMART for disk health monitoring
- iData Guard for abnormal power failure
- Wide Temperature: -40°C~85 °C
- Supports TRIM/NCQ/SMART
- DEVSLP supported




## Introduction

Innodisk CFast 3MG2-P is SATA III 6Gb/s flash based disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. CFast 3MG2-P not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

# CFast 3MG2-P series

## Drawing

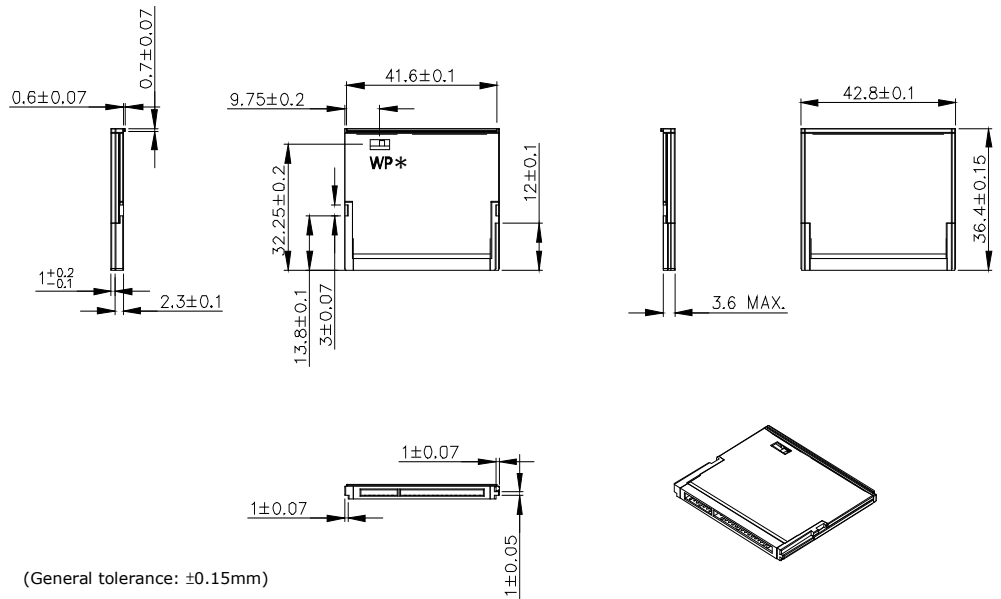

(General tolerance: ±0.15mm)

## Specifications

Interface	SATA III
Flash Type	MLC
Capacity	32GB~256GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	560/350
Max. Power Consumption	2.5W(3.3V x 760 mA)
Thermal Sensor	ST- default / WT- default
External DRAM Buffer	Yes
H/W Write Protect	Optional*
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Contact us for more information about the CFast 3MG2-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

Tel: +886-2-77033000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-40-3045-400  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689

[www.innodisk.com](http://www.innodisk.com)

© 2017 Innodisk Corporation.  
All right reserved. Specifications are subject to change without prior notice.

20170915

## Ordering Information

Operation Temp.	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DGCFA-32GD81BCADC(W)	DGCFA-64GD81BCAQC(W)	DGCFA-A28D81BCAQC(W)	DGCFA-B56D81BCAQC(W)
Industrial Grade (-40°C ~ +85°C)	DGCFA-32GD81BWADC(W)	DGCFA-64GD81BWAQC(W)	DGCFA-A28D81BWAQC(W)	DGCFA-B56D81BWAQC(W)

\*H/W write protect function is optional.

(For the write protect demand, please place the order by PN: DGCFA-xxxD81BxAxCW)

\*D: Dual channel / Q: Qual channel

**innodisk**

[www.innodisk.com](http://www.innodisk.com)