

# NT24k<sup>®</sup>-8TX-POE Industrial PoE+ Switch

N-Tron<sup>®</sup> Networking Series



## ▶▶▶ Industrial Managed Gigabit PoE+ Ethernet Switch

Red Lion's N-Tron<sup>®</sup> series NT24k<sup>®</sup>-8TX-POE compact managed Gigabit Ethernet switch features eight 10/100/1000Base-T(X) ports with PoE+ providing a robust solution for transmitting power and data to equipment in harsh environments.

The NT24k-8TX-POE managed switch features 8 ports (eight Gigabit IEEE 802.3af/at Power over Ethernet Plus (PoE+) ports) and is housed in a compact, hardened metal DIN-rail enclosure with redundant 22-49 VDC power inputs. Designed to handle the most demanding environments, the NT24k-8TX-POE provides up to 30 Watts of power per port, high shock and vibration ratings and a wide -40° to 80°C operating temperature range.



### APPLICATIONS

- > Alternative Energy
- > Manufacturing
- > Oil & Gas
- > Transportation
- > Water/Wastewater

### PRODUCT HIGHLIGHTS

- > IEEE 802.3af/at PoE+ Output
- > Smart Plug-and-Play Operation
- > 22 to 49 VDC Redundant Power Inputs
- > -40° to 80°C Wide Operating Temperature
- > Robust Remote Monitoring
- > N-Ring™ & N-Link™ Network Ring Technology

### IEEE 1588v2 PTP OPTIONS

- Boundary Clock
  - Transparent Clock
- IEEE 1588v2 applications include
- Coordinated motion control
  - Time-stamped data logging
  - Time-stamped fault detection

**PTP Models & Upgrade Kit Available**

### FEATURES & BENEFITS

- > 8 Copper Ports
  - Eight 10/100/1000Base-T(X) copper ports, supporting PoE+ on each port
- > Redundant 22 to 49 VDC Power Inputs
  - Boosts power to meet PoE+ output requirements
- > IEEE 802.3af/at PoE Output
  - Supports PoE+ output on all copper ports simultaneously
- > Extended Environmental Specifications
  - -40° to 80°C operating temperature range
  - > 2M hours MTBF
  - UL/cUL: Class I, Div. 2 Groups A, B, C and D
- > Plug-and-Play Operation:
  - IGMP auto-configuration
  - MDIX auto-sensing cable
  - Simple network ring configuration
  - Backup and restore via recovery card or XML
- > Fully Managed Features Include:
  - SSH/SSL/HTTPS
  - SNMP v1, v2, v3
  - Web browser management
  - Detailed ring map and fault location charting
  - RSTP - 802.1d, 802.1w, 802.1D
  - Trunking and port mirroring
  - 802.1Q tag VLAN and port VLAN
  - IEEE 802.1x with RADIUS remote server authentication
  - DHCP Server, Option 82 relay, Option 61, IP fallback
  - Port Security – MAC address based
  - 802.1p QoS, port QoS and DSCP
  - Event Log/Syslog
  - SNTP (Simple Network Time Protocol)
  - IEEE 1588v2 (PTP) models available
  - Multi-Member N-Ring technology with ~30ms healing
  - N-Link redundant ring technology
  - N-View™ monitoring technology
  - EtherNet/IP™ CIP™ messaging
  - 802.1AB-2005 LLDP (Link Layer Discovery Protocol)

industrial  
networking



Authorised Distributor  
**ADITECH ICT PVT. LTD.**

803,sigma IT park,plat no 203/204 Rabale, TTC Industrial area, Thane-Belapurroad, Rabale-400701  
Tel:+91 9819884527 Email: [sales@aditech.in](mailto:sales@aditech.in) Website:[www.aditech.in](http://www.aditech.in)

# ▶▶▶ NT24k-8TX-POE Specifications

## SWITCH PROPERTIES

Operation: Managed  
Number of MAC Addresses: 16,000  
IEEE Compliant: 802.3, 802.3u, 802.3ab, 802.3x, 802.3af/at, 802.1d/D/w, 802.1p, 802.1Q, 802.1x  
IEEE 1588v2 Software-Based Option  
Latency (Typical): 1.6 µs  
Switching Method: Store-and-Forward  
Supports 30 Watts per Port (25.5 Watts at the PD)  
LED Status Indicators  
Configurable Alarm Contact  
Onboard Temperature Sensor  
Supports Full/Half Duplex Operation  
Maximum Throughput: Up to 16 Gb/s  
MDIX Auto Sensing Cable  
Auto Sensing Speed and Flow Control  
Communications: Full Wire Speed  
MTBF: >2 million hours  
Jumbo Frame Support

## POWER INPUT

Input Voltage: 22-49 VDC  
Steady Input Current: 10.94 A @ 24 VDC  
Inrush: 68.0 A / .09 ms @ 24 VDC  
BTU/HR: 122

## POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit PSE  
PoE Output Power: 57 VDC / 30 Watts Output (25.5 W at PD)  
Power Pin Assignment: Pins 1/2 (-), Pins 3/6 (+)  
PSE Type: Type 2

## CONNECTORS

10/100/1000BaseT: Eight (8) RJ-45 ports  
ESD and surge protection diodes on all copper ports  
Configuration Port: One (1) USB Type B

## NETWORK MEDIA

10BaseT: ≥ Cat3 cable  
100BaseTX: ≥ Cat5 cable  
1000BaseT: ≥ Cat5e cable

## RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)  
Top: 4" (10.16 cm)

## ENVIRONMENTAL

Operating Temperature: -40°C to 80°C  
Storage Temperature: -40°C to 85°C  
Operating Humidity: 10% to 95% (non condensing)  
Operating Altitude: 0 to 10,000 ft.  
Shock: 200 g @ 10 ms (bulkhead mounted)  
Vibration: 50 g @ 5-200 Hz, Triaxial (bulkhead mounted)

## CERTIFICATION & COMPLIANCE

Product Safety:  
ANSI/ISA 12.12.01-2013 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations  
UL508 Industrial Control Equipment  
CAN/CSA-C22.2 No. 213-M1987 Class I Div. 2 Hazardous Locations  
CAN/CSA-C22.2 No. 14-M1987 Industrial Control Equipment  
Emissions:  
FCC Title 47, Part 15, Radio Frequency Devices, Subpart B ANSI C63.4-2009; Industry Canada ICES-003, EN 55011; EN 61000-6-4, EN 61000-3-2, EN61000-3-3, EN 55032  
Immunity:  
EN 55024, EN 61000-6-2; IEC 61000-4-2 (ESD); IEC 61000-4-3 (RFAM); IEC 61000-4-4 (EFT); IEC 61000-4-5 (SURGE); IEC 61000-4-6 (RFM); IEC 61000-4-8 (PFMF); IEC 61000-4-11 (VDI)  
Rail:  
EN 50155, EN 50121 and EN 61373  
Designed to Comply with:  
IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)  
Other:  
ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

## MECHANICAL

Case Dimensions:  
Height: 5.88" (14.92 cm)  
Width: 4.28" (10.88 cm)  
Depth: 5.54" (14.07 cm)  
Weight: 3.13 lbs (1.42 kg)  
Mount: DIN Rail 35 mm

## WARRANTY


3 Years on Design and Manufacturing Defects

## ORDERING GUIDE

PART NUMBER	DESCRIPTION
NT24K-8TX-POE	Eight Port 10/100/1000BaseT Managed PoE+ Industrial Ethernet Switch
NT24K-8TX-POE-PT	Eight Port 10/100/1000BaseT Managed PoE+ Industrial Ethernet Switch, PTP Enabled
NTCD-CFG	NT24k Configuration Recovery Device
NTPS-24-20	DIN-Rail Power Supply 20 Amp @ 24 VDC
NTPS-48-10	DIN-Rail Power Supply 10 Amp @ 48 VDC
NT24K-NM-PMK	NT24k Non-Modular Panel Mount Kit
NT24K-KIT-PTP	NT24k Upgrade License to Enable IEEE 1588/PTP on Non-PT NT24k Switches

# ▶▶▶ NT24k-8TX-POE Specifications

## DIMENSIONS

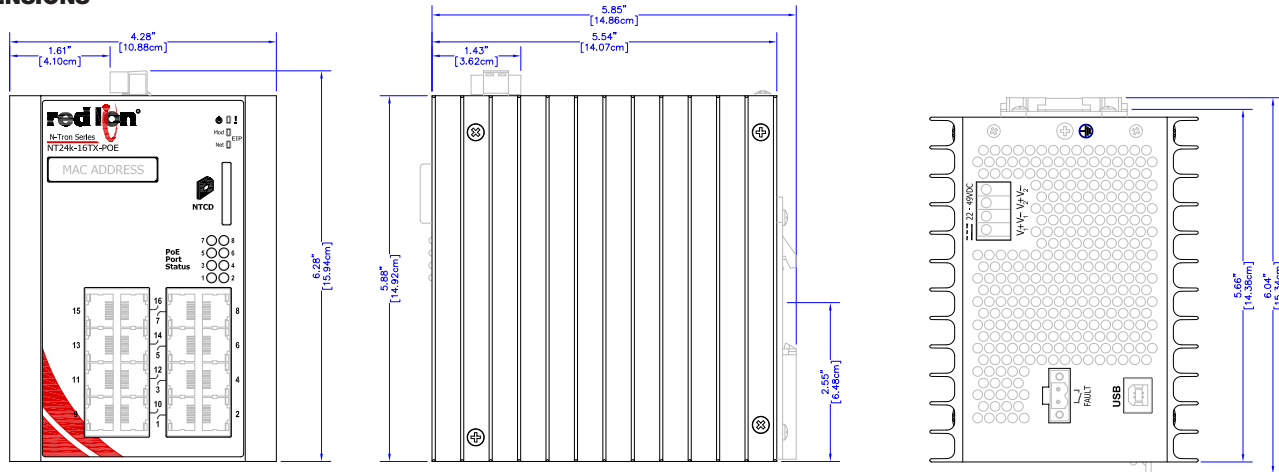

All specifications are subject to change. Consult the company website for more information.

**Authorised Distributor**  
**ADITECH ICT PVT. LTD.**

803, sigma IT park, plat no 203/204 Rabale, TTC Industrial area, Thane-Belapurroad, Rabale-400701  
 Tel: +91 9819884527 Email: [sales@aditech.in](mailto:sales@aditech.in) Website: [www.aditech.in](http://www.aditech.in)



**Americas**  
[sales@redlion.net](mailto:sales@redlion.net)

**Asia-Pacific**  
[asia@redlion.net](mailto:asia@redlion.net)

**Europe**  
**Middle East**  
**Africa**  
[europe@redlion.net](mailto:europe@redlion.net)  
**+1 (717) 767-6511**

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit [www.redlion.net](http://www.redlion.net). Red Lion is a Spectris company.

ADLD0406 0601119 © 2019 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.