




Features


- Compliant with PCI Express Base Specification
- Compliant with Universal Serial Bus 2.0 Specification
- Supports M.2 A-E key wireless module such as 3G, 4G, WLAN, WWAN, Bluetooth
- Supports M.2 2230/2242 form factor
- Supports M.2 PCIe Lane 0 & Lane 1 by pin header setting
- Industrial temperature -40 °C to 85 °C

Mechanical Drawing

EMXX-0101-W1

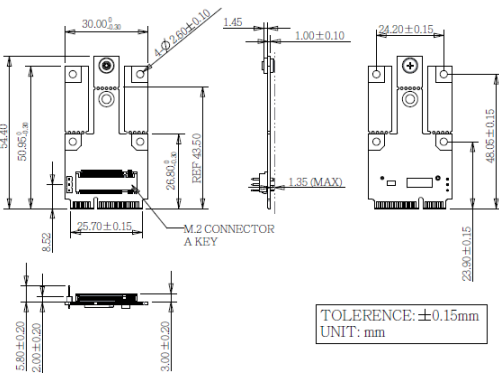

EMXX-0101-W2

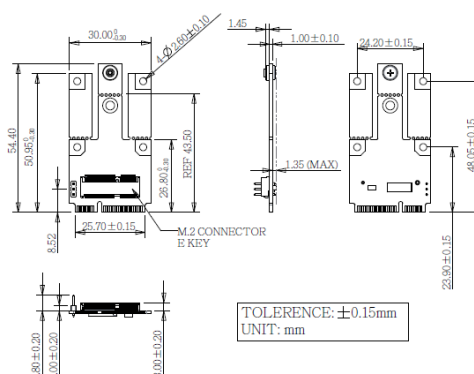

Jumper Setting	
PCIe Lane 0	
PCIe Lane 1	

Specifications

Form-Factor	mPCIe
Input I/F	PCI Express , USB 2.0
Output I/F	PCI Express , USB 2.0
Output Connector	M.2 Key-A-E
Dimension (WxLxH)	30 x 54.4 x 8.15 mm
Temperature	Operation: W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

Order information

- EMXX-0101-W1**
mPCIe to M.2 A key Module
- EMXX-0101-W2**
mPCIe to M.2 E key Module

Distributor

ADITECH ICT PVT LTD

803, Sigma IT Park, Plot No R203/204, TTC Industrial Area, Thane Belapur Road, Rabale, Navi Mumbai-400701
Call / WhatsApp : +91 9819884527 | Email : sales@aditech.in | Website : www.aditech.in