


IMB-792

ATX Motherboard

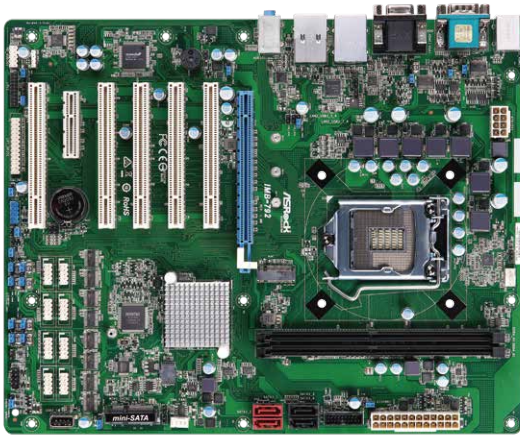

Spotlight Features

- Supports Intel® 7th/ 6th Gen (Kabylake-S/Skylake-S) Core™ Processors (Socket 1151)
- Supports Dual Channel DDR4 2133MHz, up to 32GB
- 1 x VGA, 1 x HDMI
- 4 x USB 3.0, 5 x USB 2.0, 4 x SATA3, 10 x COM
- 1 x PCIe x16, 1 x PCIe x4, 5 x PCI,
- 1 x mSATA, 1 x M.2 (KEY M)
- 2 x Intel LAN
- 1 x TPM Header
- ATX PWR 24+8-pin

Specifications

Processor System

| | |
|------------|---|
| Dimensions | ATX (12-in x 9.6-in) |
| CPU | Supports Intel® 7 th / 6 th Gen (Kabylake-S/Skylake-S) Core™ Processors |
| Chipset | Intel® H110 |

Expansion Slot

| | |
|-----------|--|
| PCIe | 1 x PCIe x16, 1 x PCIe x4 |
| PCI | 5 |
| mini-PCIe | N/A |
| mSATA | 1 x full size with shared SATA3 and USB 2.0 |
| M.2 | 1x M.2 (Key M, 2242/2260/2280) with shared SATA3 for SSD |

Memory

| | |
|------------|----------------------------|
| Technology | Dual Channel DDR4 2133 MHz |
| Max | 32 GB |
| Socket | 2 x Long-DIMM |

Graphics

| | |
|---------------|--|
| Controller | Intel® Gen9 Graphics DX 11/12, OGL4.3/4.4 |
| VGA | Supports max resolution up to 1920x1200@60Hz |
| LVDS | N/A |
| eDP | N/A |
| HDMI | Max resolution up to 4096x2160@30Hz |
| DVI | N/A |
| DisplayPort | N/A |
| Multi Display | Dual Display |

Ethernet

| | |
|------------|---------------------------------|
| Interface | 10/100/1000 Mbps |
| Controller | 1 x Intel I210, 1 x Intel I219V |

Rear I/O

| | |
|-------------|-------------------------------|
| VGA | 1 |
| DVI | N/A |
| HDMI | 1 |
| DisplayPort | N/A |
| Ethernet | 2 |
| USB | 2 x USB3.0, 2 x USB2.0 |
| Serial | 2 x COM (RS-232/422/485) |
| Audio Jack | 3 (Mic-in, Line-in, Line-out) |
| PS/2 | 2 (1 x keyboard, 1 x mouse) |

Internal Connector

| | |
|---------------------|--|
| USB | 2 x USB3.0, 3 x USB2.0 |
| LVDS | N/A |
| eDP | N/A |
| VGA | N/A |
| Serial | 8 x COM(RS-232) |
| SATA | 4x SATA3, one is shared with M.2 Key M, one is shared with mSATA |
| Parallel | 1 (shared with GPIO) |
| GPIO | 8 x GPI, 8 x GPO |
| SATA PWR Output Con | N/A |
| Speaker Header | 1 |
| TPM | 1 x Header |

Watchdog Timer

| | |
|----------|----------------------------------|
| Output | From Super I/O to drag RESETCON# |
| Interval | 256 segments, 0,1,2...255sec/min |

Power Requirements

| | |
|-----------|---|
| Input PWR | ATX PWR 24+8-pin |
| Power On | AT/ATX Supported AT : Directly PWR on as power input ready ATX : Press button to PWR on after power input ready |

Environment

| | |
|-----------------------|--------------|
| Operating Temperature | 0°C – 60°C |
| Storage Temperature | -40°C – 85°C |

Authorised Distributor

ADITECH ICT PVT LTD

803, Sigma IT Park, Plot No R203/204, TTC Industrial Area, Thane Belapur Road, Rabale, Navi Mumbai-400701 Call / WhatsApp : +91 9819884527
Email : sales@aditech.in | Website : www.aditech.in