

TECHNICAL DATASHEET 1200W CRPS 2U Redundant **FSP1200-50FS**



ADITECH ICT PVT LTD 803, Sigma IT Park, Plot No R203/204, TTC Industrial Area, Thane Belapur Road, Rabale, Navi Mumbai-400701 Call / WhatsApp : +91 9819884527 Email : <u>sales@aditech.in</u> | Website : <u>www.aditech.in</u>



FSP1200-50FS

Authorised Distributor

FEATURES

- Certified CB 62368-1 & CB 60950-1
- Meet 80 Plus Platinum
- Meet CRPS Standard
- Meet PMBus 1.2
- Design for 5,000 Meter above sea level
- **High Reliability**
- Low Ripple & Noise
- **Over Current Protection**
- **Over Temperature Protection**
- **Over Voltage Protection**

SAFETY STANDARD APPROVAL





DESCRIPTION

FSP1200-50FS is a redundant power supply base on CRPS standard. The power supply comes to offer the total power capacity up to 1200 Watts, and provides PMbus features, which makes it be able to communicate with motherboard. In addition, the power supply is ideally the best choice for datacenter, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.

GENERAL SPECIFICATIONS

| Dimension (L x W x H): | 250 x 76 x 83.8 (mm) 9.84 x 3 x 3.3 (inch) | Environment Working temperature: Storage temperature: | 0°C to 55°C -20°C to + 80°C |
|----------------------------------|---|---|---|
| Efficiency: | 80 Plus Platinum (Module) | Working humidity: Storage humidity: | 5% to 90% RH non-condensing 5% to 95% RH non-condensing |
| Hold-up time at 100%: Loading | 12V = 11ms 12Vsb = 70ms | 0 , | 500,000 hours of continuous operation at 55°C, 100% output load |
| Operating altitude: | 5,000 meters above sea level | Applications: | Storage System , Workstation, Industry Controller |

INPUT SPECIFICATIONS

| Input voltage: | 90-264Vac |
|------------------|---------------------------|
| Input frequency: | 47-63Hz |
| Input current: | 115Vac @ 12A, 230Vac @ 7A |

OUTPUT RATING

| Outputs | Input Voltage | Min. Current | Max. Current | Total Output Power | |
|---------|------------------|--------------|---|--|---|
| +12V | 100~240V | 0.5A | 80.5A for 90~180VAC 97A for 180~264VAC | 966W for 90~180VAC 1164W for 180~264VAC | |
| +3.3V | 100~240V | 0.0A | 30A | 180W | 1000W for 90~180VAC 1200W for 180~264VAC |
| +5V | 100~240V | 0.0A | 30A | | |
| -12V | 100~240V | 0.0A | 0.3 | 3.6W | |
| +12Vsb | 100~240V | 0.0A | 5A | 22.5W | |






TECHNICAL DATASHEET **1200W CRPS 2U Redundant** FSP1200-50FS



MECHANICAL SPECIFICATIONS

UNIT: mm

2

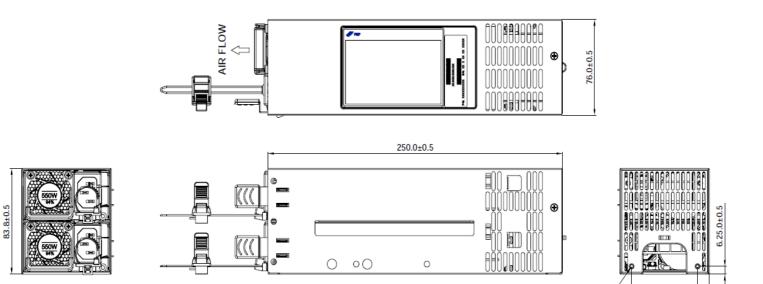

2-M3*0.5

56.0±0.5

10.0±0.

Authorised Distributor ADITECH ICT PVT LTD 803, Sigma IT Park, Plot No R203/204,TTC Industrial Area,Thane Belapur Road, Rabale,Navi Mumbai-400701 Call / WhatsApp : +91 9819884527 | Email : <u>sales@aditech.in</u> | Website : <u>www.aditech.in</u>