

# NT24k<sup>®</sup>-8TX Industrial Ethernet Switch

N-Tron<sup>®</sup> Networking Series



## ▶▶▶ Industrial Managed Gigabit Ethernet Switch

Red Lion's N-Tron<sup>®</sup> series NT24k<sup>®</sup>-8TX compact managed Gigabit Ethernet switch features eight 10/100/1000Base-T(X) ports providing a reliable and secure communication network to equipment in harsh environments.

The versatile NT24k-8TX managed switch features 8 ports (eight Gigabit copper ports) and is housed in a compact, hardened metal DIN-rail enclosure with redundant 10-49 VDC power inputs. Designed to handle the most demanding environments, the NT24k-8TX offers wire-speed throughput, expanded shock and vibration ratings and wide -40° to 85°C operating temperature rating. IGMP auto-configuration, IEEE 802.1x with RADIUS remote server authentication and N-Ring<sup>™</sup> fast healing ring technology ensure quick deployment and robust secure network communications in alternative energy, factory automation applications, transportation and water/wastewater.



### APPLICATIONS

- > Alternative Energy
- > Manufacturing
- > Oil & Gas
- > Transportation
- > Water/Wastewater

### PRODUCT HIGHLIGHTS

- > Copper Ports
- > Smart Plug-and-Play Operation
- > 10 to 49 VDC Redundant Power Inputs
- > -40° to 85°C Wide Operating Temperature
- > Robust Remote Monitoring
- > N-Ring & N-Link<sup>™</sup> Network Ring Technology

### IEEE 1588v2 PTP OPTIONS

- Boundary Clock
- Transparent Clock

IEEE 1588v2 applications include

- Coordinated motion control
- Time-stamped data logging
- Time-stamped fault detection

**PTP Models & Upgrade Kit Available**

### FEATURES & BENEFITS

- > 8 Copper Ports
  - Eight 10/100/1000Base-T(X) copper ports
- > Redundant 10 to 49 VDC Power Inputs
  - Keeps network running in the event of a power supply failure
- > Extended Environmental Specifications
  - -40° to 85°C operating temperature range
  - > 2M hours MTBF
  - UL/cUL: Class I, Div. 2 Groups A, B, C and D
- > Plug-and-Play Operation:
  - IGMP auto-configuration
  - MDIX auto-sensing cable
  - Simple network ring configuration
  - Backup and restore via recovery card or XML
- > Fully Managed Features Include:
  - SSH/SSL/HTTPS
  - SNMP v1, v2, v3
  - Web browser management
  - Detailed ring map and fault location charting
  - RSTP - 802.1d, 802.1w, 802.1D
  - Trunking and port mirroring
  - 802.1Q tag VLAN and port VLAN
  - IEEE 802.1x with RADIUS remote server authentication
  - DHCP Server, Option 82 relay, Option 61, IP fallback
  - Port Security – MAC address based
  - 802.1p QoS, port QoS and DSCP
  - Event Log/Syslog
  - SNTP (Simple Network Time Protocol)
  - IEEE 1588v2 (PTP) models available
  - Multi-Member N-Ring technology with ~30ms healing
  - N-Link redundant ring technology
  - N-View<sup>™</sup> monitoring technology
  - EtherNet/IP<sup>™</sup> CIP<sup>™</sup> messaging
  - 802.1AB-2005 LLDP (Link Layer Discovery Protocol)

industrial  
networking



EtherNet/IP<sup>™</sup>

# NT24k-8TX Specifications

## SWITCH PROPERTIES

Operation: Managed  
 Number of MAC Addresses: 16,000  
 IEEE Compliance: 802.3, 802.3u, 802.3ab, 802.3x, 802.1d/D/w, 802.1p, 802.1Q, 802.1x  
 IEEE 1588v2 Software-Based Option  
 Latency (Typical): 1.6  $\mu$ s  
 Switching Method: Store-and-Forward  
 LED Status Indicators  
 Configurable Alarm Contact  
 Onboard Temperature Sensor  
 Supports Full/Half Duplex Operation  
 Maximum Throughput: Up to 16 Gb/s  
 MDIX Auto Sensing Cable  
 Auto Sensing Speed and Flow Control  
 Communications: Full Wire Speed  
 MTBF: >2 million hours  
 Jumbo Frame Support

## POWER INPUT

Input Voltage: 10-49 VDC  
 Steady Input Current: 490 mA @ 24 VDC  
 Inrush: 22 A / .33 ms @ 24 VDC  
 BTU/HR: 40.14

## CONNECTORS

10/100/1000BaseT: Eight (8) RJ-45 ports  
 ESD and surge protection diodes on all copper ports  
 Configuration Port: One (1) USB Type B

## NETWORK MEDIA

10BaseT:  $\geq$  Cat3 cable  
 100BaseTX:  $\geq$  Cat5 cable  
 1000BaseT:  $\geq$  Cat5e cable


## RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)  
 Top: 4" (10.16 cm)

## ENVIRONMENTAL

Operating Temperature: -40°C to 85°C  
 Storage Temperature: -40°C to 85°C  
 Operating Humidity: 10% to 95% (non condensing)  
 Operating Altitude: 0 to 10,000 ft.  
 Shock: 200 g @ 10 ms (bulkhead mounted)  
 Vibration: 50 g @ 5-20 Hz, Triaxial (bulkhead mounted)

## DIMENSIONS

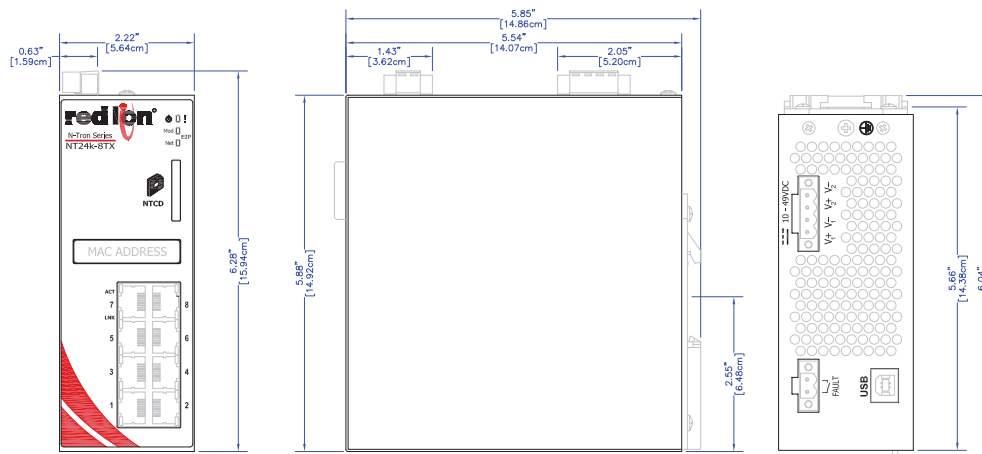

All specifications are subject to change. Consult the company website for more information.

## CERTIFICATION & COMPLIANCE

Product Safety:  
 ANSI/ISA 12.12.01-2013 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations  
 UL508 Industrial Control Equipment  
 CAN/CSA-C22.2 No. 213-M1987 Class I Div. 2 Hazardous Locations  
 CAN/CSA-C22.2 No. 14-M1987 Industrial Control Equipment  
 Emissions:  
 FCC Title 47, Part 15, Radio Frequency Devices, Subpart B ANSI C63.4-2009; Industry Canada ICES-003, EN 55011; EN 61000-6-4, EN 61000-3-2, EN61000-3-3, EN 55032  
 Immunity:  
 EN 55024, EN 61000-6-2; IEC 61000-4-2 (ESD); IEC 61000-4-3 (RFAM); IEC 61000-4-4 (EFT); IEC 61000-4-5 (SURGE); IEC 61000-4-6 (RFCM); IEC 61000-4-8 (PFMF); IEC 61000-4-11 (VDI)  
 Rail:  
 EN 50155, EN 50121 and EN 61373  
 Designed to Comply with:  
 IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)  
 Other:  
 ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

## MECHANICAL

Case Dimensions:  
 Height: 5.88" (14.92 cm)  
 Width: 2.22" (5.64 cm)  
 Depth: 5.54" (14.07 cm)  
 Weight: 1.68 lbs (0.76kg)  
 Mount: DIN Rail 35 mm

## WARRANTY

3 Years on Design and Manufacturing Defects

## ORDERING GUIDE

PART NUMBER	DESCRIPTION
NT24K-8TX	Eight Port 10/100/1000BaseT Managed Industrial Ethernet Switch
NT24K-8TX-PT	Eight Port 10/100/1000BaseT Managed Industrial Ethernet Switch, PTP Enabled
NTCD-CFG	NT24k Configuration Recovery Device
NTPS-24-1.3	DIN-Rail Power Supply 1.3 Amp @ 24 VDC
NT24K-NM-PMK	NT24k Non-Modular Panel Mount Kit
NT24K-KIT-PTP	NT24k Upgrade License to Enable IEEE 1588/PTP on Non-PTP NT24k Switches



**Americas**  
 sales@redlion.net  
**Asia-Pacific**  
 asia@redlion.net  
**Europe Middle East Africa**  
 europe@redlion.net  
 +1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit [www.redlion.net](http://www.redlion.net). Red Lion is a Spectris company.

ADLD0404 0601119 © 2019 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.